




Taurus Solar Bollard

Aluminium powdercoated to a satin grey or black finish

Eco Solar Lights



Suitable to fix to most surfaces

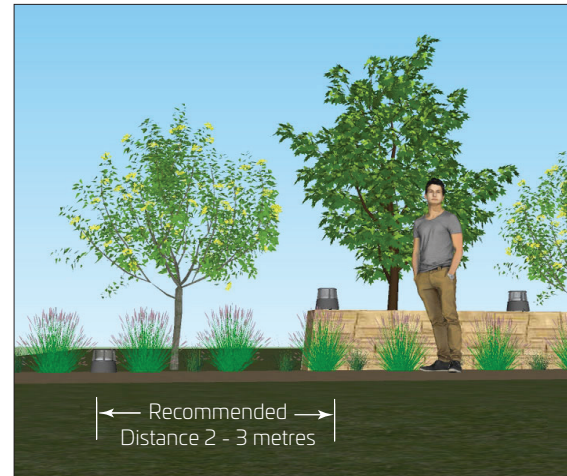

Also available in black



Features

- Commercial grade solar lighting
- Requires 10 - 12 hrs charge prior to use
- 10 - 12 hours light output per night
- High quality inbuilt
- Attractive modern design
- Ideal for illuminating paths and walkways
- Automatic light sensor turns LEDs on and off for dusk to dawn operation
- Warranty: 1 year warranty for faulty workmanship or component failure not influenced by external means

Specifications SOLB005

- | | | | |
|----------------|--------------------------|--------------------|-----------------------------------|
| • Colour | Powdercoat black or grey | • Solar Panel | 9V 2.5watts |
| • Charge Time | 4 - 6 hours | • Solar Panel Size | 130H x 110Wmm |
| • CCT | 4000K (cool white) | • Light Source | 12 high intensity LEDs |
| • Bollard Size | 250H x 240Wmm (base) | • Battery | LiFePO4 battery |
| • Brightness | Approx. 200 lumen output | • Material | Aluminium, polycarbonate diffuser |


What is a Lumen?

In simple terms, Lumens are a measure of the total amount of visible light from a lamp or light source. The higher the lumen rating, the "brighter" the lamp will appear.

How does this compare with other light sources?

- Familiar examples
- A typical 4 x D cell battery maglite will emit approx. 70 lumens
 - The average hardware style path light using 2-3 LEDs emits 15-18 lumens
 - A 25W incandescent globe emits approximately 160 lumens

- Solar panel with light sensors
- Clear polycarbonate diffuser
- 12 High intensity LEDs
- Approx. 200 lumen output
- Built-in LiFePO4 battery
- Concealed on/off button
- Bolt-down installation

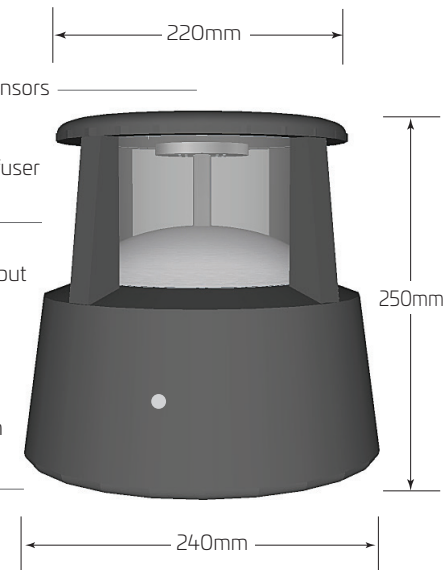

3 x concealed fixing points



Solar panel including light sensor

