




30 high intensity LEDs

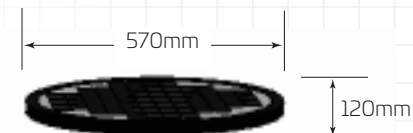

- PIR sensor
- Approx. 900 lumen output
- Inbuilt LiFePO4 battery
- On/off switch

Features

- Commercial grade solar lighting
- Requires 10 - 12 hours charge prior to use
- 10 - 12 hour light output per night
- High quality inbuilt LiFe PO4 battery
- Mounting Height: 3 to 4 metres
- Ideal for illuminating larger areas
- Auto PIR operation*
- Custom brackets or post manufactured on request
- Warranty: 1 year warranty for faulty workmanship or component failure not influenced by external means

Specifications SOLL003


- | | | | |
|---------------|--------------------------|----------------|--------------------------------|
| • Colour | Powdercoat satin black | • Solar Panel | 18V 26watts (570mm diameter) |
| • Charge Time | 4 - 6 hours | • Light Source | 30 high intensity LEDs |
| • CCT | 4000K (cool white) | • Working Time | 10 - 12 hours per night |
| • Size | 570W x 120Hmm | • Battery | Inbuilt LiFePO4 battery |
| • Brightness | Approx. 900 lumen output | • Material | Aluminium/steel, polycarbonate |

What is a Lumen?


In simple terms, lumens are a measure of the total amount of visible light from a lamp or light source. The higher the lumen rating, the "brighter" the lamp will appear.

How does this compare with other light sources?

Familiar examples • A typical 4 x D cell battery maglite will emit approx. 70 lumens
* The P.I.R (passive infrared) sensor is activated by movement and acts as a power saving feature. The flood light will operate at 50% output until the PIR is activated where it will operate at 100% until no movement is detected returning to 50% output.

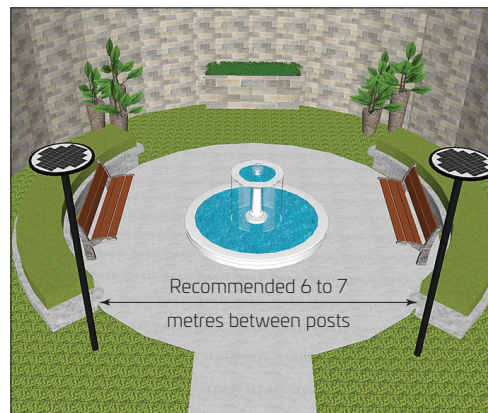

- 3 metre galvanised steel pole, powdercoated to a satin black finish (included)



Solar Panel Detail

- Bolt down or inground installation

