


# SOLAR ADVERTISING & WALL LIGHTING

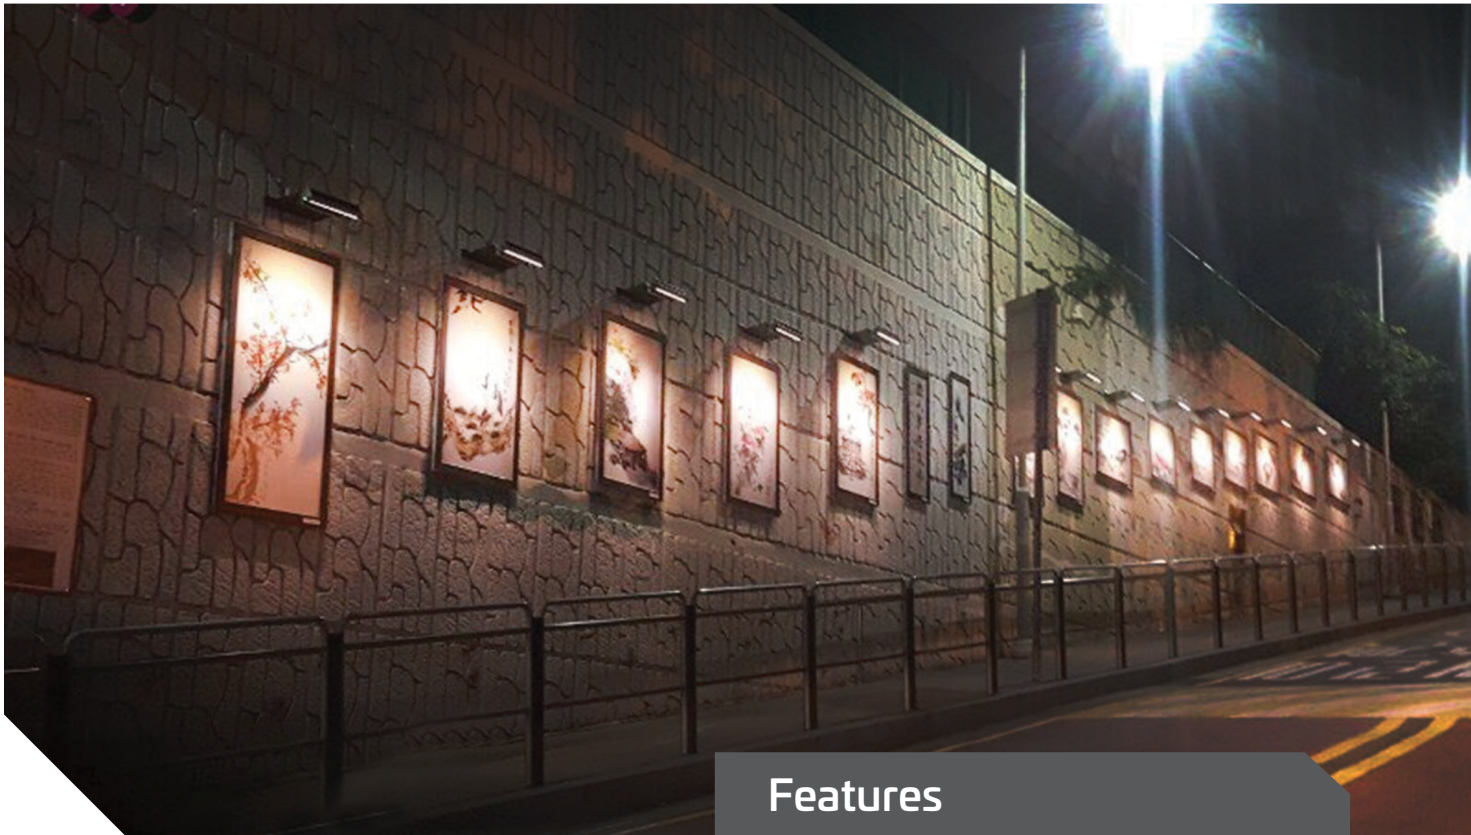

## Features

This versatile solar light lends itself to varied automatic dusk to dawn lighting applications from sign illumination, aesthetic wall wash lighting, to the highlighting of stairs, decks, walkways or features in the garden. The sturdy bracketing is fully adjustable allowing the LEDs to face up or down whilst the solar panel retains exposure to sunlight. We offer two length fittings, both featuring four easily selectable modes of operation ensuring there is a size and lighting program to suit the application. Illuminate effectively and efficiently without the need for cabling or trenching.

Stylish and functional solar lighting

Pivoting LED module delivers lighting control

Programmable smart lighting

Automatic dusk to dawn operation

Wall or decorative lighting, advertising or highlighting

Premium-grade solar lighting

Adjustable LED and panel bracketing

Integrated all-in-one design

LED face up or down

Temporary or permanent installations

Fully sealed cast aluminium body in an anodized finish

2 year warranty for faulty workmanship or component failure not influenced by external means







Luminaire Height Variable

Lumen Output 230/460 lm

LED Output 10/20 W

# SOLAR ADVERTISING & WALL LIGHTING SPECIFICATIONS

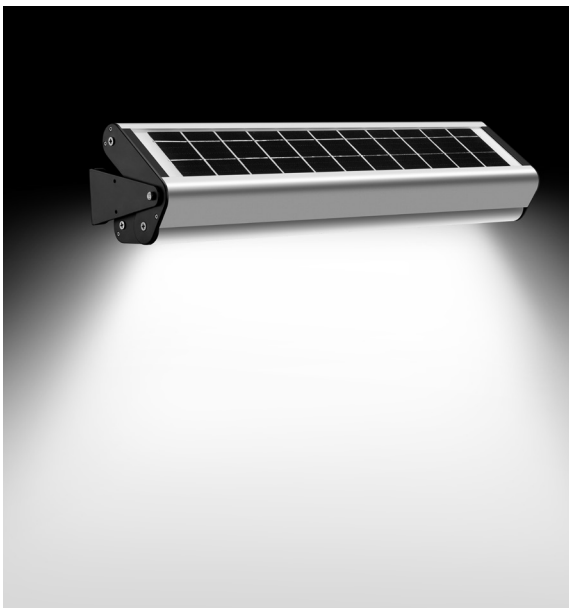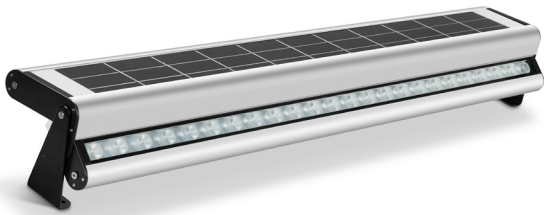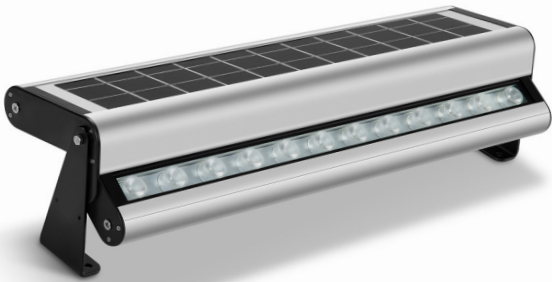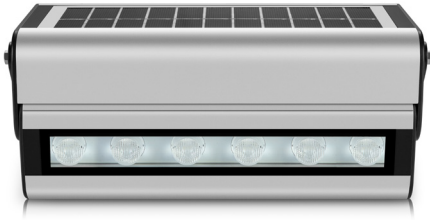

## Applications

Sign | Wall Wash | Advertising

## Technical Data

Solar Panel Wattage	6W / 12W
LED Output	10W / 20W
Lumen Output	230 Lumen/460 Lumen
Battery Type	Lithium
Battery Specifications	(29.6Wh) 8AH/(55.5Wh) 15AH @3.7V
Autonomy	Setting Dependant
Correlated Colour Temp (CCT)	6000K
Fixture Size	550 (l) x 130 (w) x 72 (h) mm 1100 (l) x 130 (w) x 72 (h) mm
Light Source	SAMSUNG 2835
Recharge	6 hours
Mounting Height	Variable
Mounting	Variable
Finish	Anodized Aluminum
Warranty Period	2 years
SKU	SOLL009/10 - SOLL009/20

## Mode of Operation

Depress button 5 seconds to switch ON/OFF.Default is M1

M1: (LED 1 flash) 6hrs 100% output to 50% of battery capacity > 20% to dawn

M2: (LED 2 flash) 5hrs 100% brightness > intermittent flashing to dawn

M3: (LED 3 flash) 6hrs 100% brightness > 20% to dawn

M4: (LED 4 flash) 100% brightness dusk to dawn

As we continue to improve the products function and/or design specifications and data provided may change without notice. Errors and omissions accepted.