


Solar Advertising & Wall Lighting Instruction

IMPORTANT: READ ALL INSTRUCTIONS
CAREFULLY BEFORE USE

Check list (As picture shown below):
(1) Lamp ; (2) Expansion screws;(3)Reinforced brackets

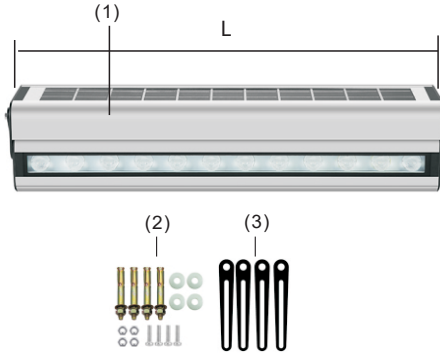

Item	LED	Solar panel	L/cm
10W	12LED	6V6W	55
20W	24LED	6V12W	110

Specification:

Item	Solar Panel	Lithium Battery	Product Material	LED Source	Light Color	Switch	Lighting Time	Charging Time	Waterproof
10W	6V/6W	3.7V 8000mAh	Aluminum Frame & Polysilicon	SAMSUNG LED 12pcs 0.5W 2835	day light / warm light	Light sensor	10~12hours	6-8hours	Ip65
20W	6V/12W	3.7V 15000mAh		SAMSUNG LED 24pcs 0.5W 2835					

Installation:

1. Screw the reinforced brackets and mount it to wall or signboard

2. Adjust the angle of solar panel and lamp


3. Fasten the reinforced brackets and turn on the light, then choose the lighting mode.

Note: You can position the light facing up or down.

User instructions:

To switch ON/OFF, Press the button for exactly 5 seconds

To switch operational modes, click the button while the light is on

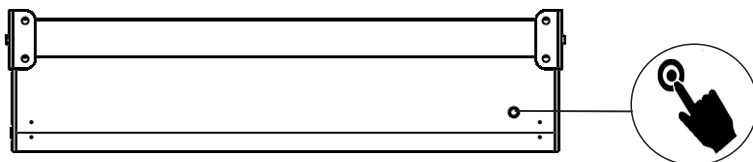

Lighting Modes:

M1: (LED 1 flash) 6hrs 100% output to 50% of battery capacity > 20% to dawn

M2: (LED 2 flash) 5hrs 100% brightness > intermittent flashing to dawn

M3: (LED 3 flash) 6hrs 100% brightness > 20% to dawn

M4: (LED 4 flash) 100% brightness dusk to dawn