
# **ALPHA 2 SOLAR** LANDSCAPE LIGHT





The Alpha range of solar courtyard and landscape lighting has been designed to be aesthetically pleasing and functional with exceptional light output over a wide area. With the body of the light manufactured from cast aluminium with a powder-coated finish they are well protected from the elements. The smart lighting control programming ensures superior dusk to dawn lighting without the need for trenching, cabling or an electrician. Designed for use in parks, gardens, driveways, courtyards, these lights will provide a functional feature in the landscape.

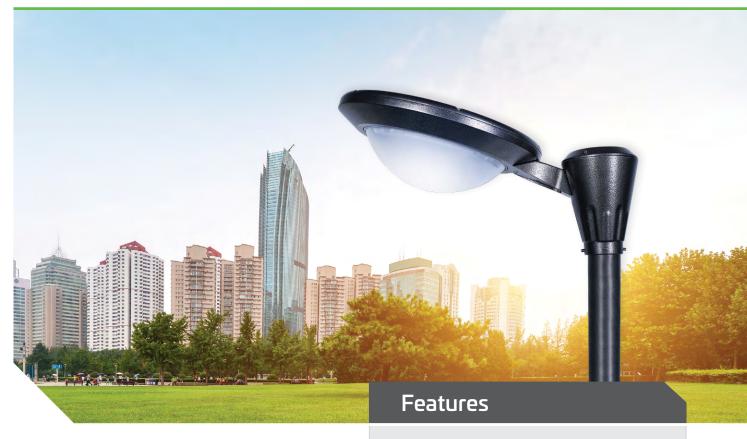

Luminaire Height	3 - 4m
Lumen Output	1440 lm
LED Output	12 W

Stylish and functional solar lighting

Automatic dusk to dawn lighting

Ideal for illuminating courtyards, walkways and medium-sized areas

Premium LifePO4 battery

Integrated all-in-one design

Mounting height of 3 - 4 metres

Fully sealed cast aluminium body in a powder coated black finish

Premium-grade solar lighting

Custom powder coated poles manufactured on request

3 year warranty for faulty workmanship or component failure not influenced by external means



## **ALPHA 2 SOLAR LANDSCAPE LIGHT SPECIFICATION**



#### 25W solar panel



### Premium LiFePO4 battery



## **Applications**

Parks and gardens | Landscape lighting | Walkways

### **Technical Data**

Solar Panel Wattage	25W
LED Output	12W
Lumen Output	1440 lm
Battery Type	LiFeP04
Battery Specifications	12.8V 10AH (128 Wh)
Autonomy	>3 Nights
Correlated Colour Tem	1p (CCT) <b>4500K</b>
Fixture Size	510 (dia) x 750 (h) x 250 (w) mm
Light Source	Epistar 1018
Recharge	6 hours
Mounting Height	3 - 4 metres
Mounting	90mm column - 76mm spigot
Finish	Powdercoated cast aluminium
Warranty Period	3 years
SKU	SOLL013

## Mode of Operation

Up to 14 hours continuous operation. Four hours at 100% output then 30% of full output until dawn. Custom lighting programs are available to suit specific lighting requirements.

As we continue to improve the products function and/or design specifications and data provided may change without notice. Errors and omissions accepted.

