


ALPHA 3 SOLAR LANDSCAPE LIGHT



Features

The Alpha range of solar courtyard and landscape lighting has been designed to be aesthetically pleasing and functional with exceptional light output over a wide area. With the body of the light manufactured from cast aluminium with a powdercoated finish they are well protected from the elements. The dual PIR sensors pick up movement, activating the lights when approaching from either direction, this combined with smart lighting control programming ensures superior dusk to dawn lighting without the need for trenching, cabling or an electrician. Designed for use in parks, gardens, driveways, courtyards, these lights will provide a functional feature in the landscape.

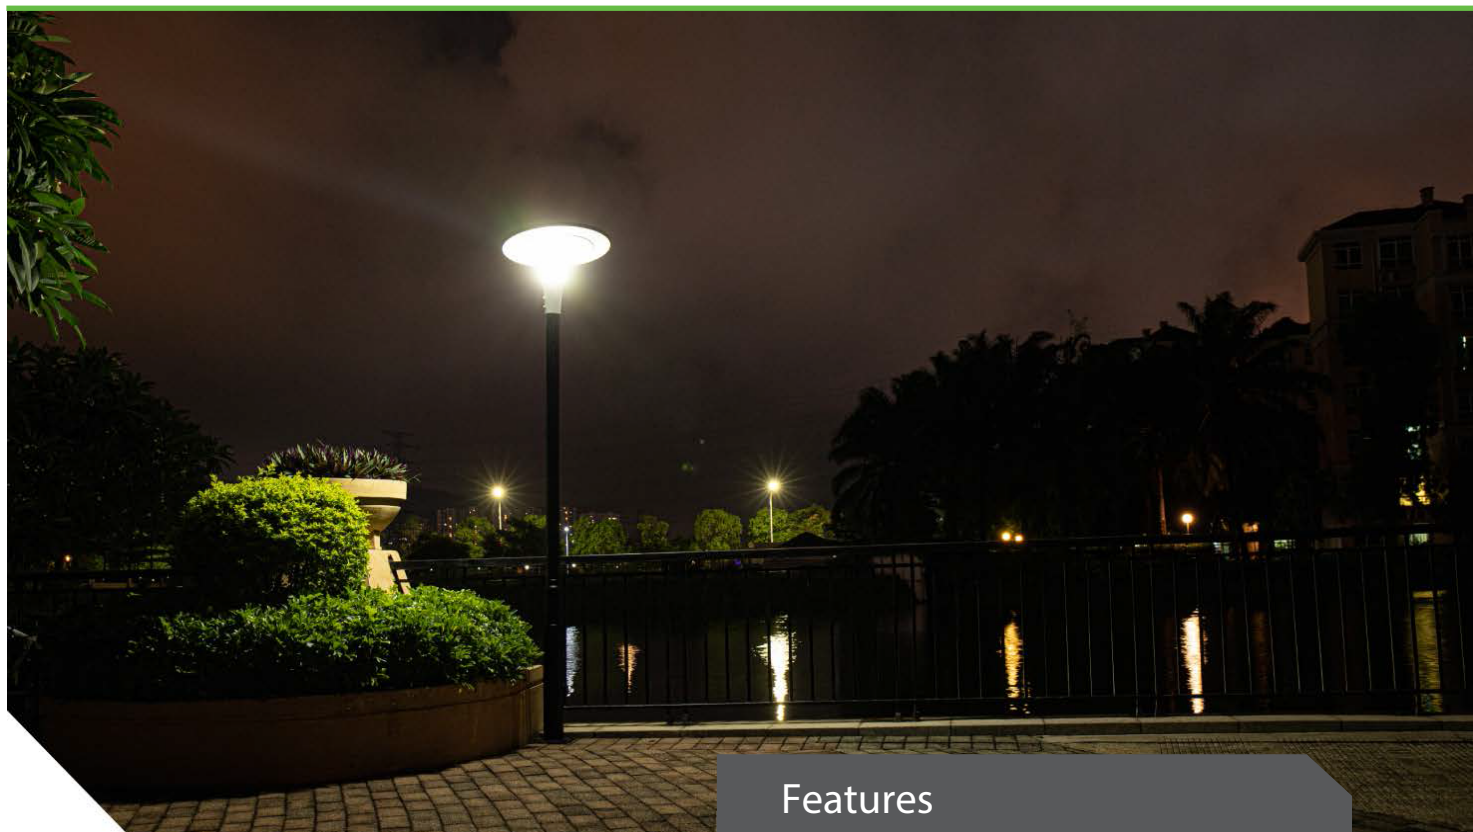

Luminaire Height	3 - 4m
Lumen Output	28 00 lm
LED Output	18W

Stylish and functional solar lighting

Automatic dusk to dawn lighting

Ideal for illuminating courtyards, walkways and medium-sized areas

Premium Lithium-Ion battery

Multi-Function Remote Controlled

Mounting height of 3-4 metres

Fully sealed cast aluminium body in a powder coated black finish


Premium-grade solar lighting

Custom powder coated poles manufactured on request

IK08 impact resistant lens and body

5 year warranty for faulty workmanship or component failure not influenced by external means

ALP HA 3 SOLAR L AND SCAPE LIGHT SPECIFICATION

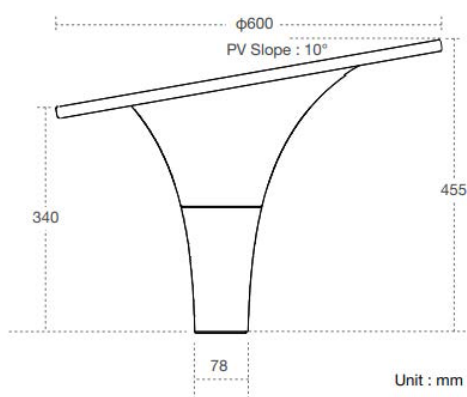

Applications

Parks and gardens | Landscape lighting | Walkways

Technical Data

Solar Panel Wattage	42W
LED Output	18W
Lumen Output	2800 lm
Battery Type	LiFePO4
Battery Specifications	12.30AH 12.8V (153.6Wh)
Autonomy	Setting Dependant
Correlated Colour Temp (CCT)	Selectable
Fixture Size	600mm Dia x 455mm high
Light Source	SMD2835 x 128
Recharge	+/- 4 hours
Mounting Height	3 - 4 metres
Mounting	76mm Spigot
Finish	Powder-coated cast aluminium
Warranty Period	5 years
SKU	SOLL0 13

Mode of Operation

Multi-Function Remote Operated (Included with light)

- Auto ON at dusk, OFF at dawn different output levels.
- Operate at 30% to 100% output when sensor is triggered.
- Operate at constant output for set time periods (4, 6 or 12H).
- Remote able to change CCT (light colour), to cool white or warm white.

As we continue to improve the products function and/or design specifications and data provided may change without notice. Errors and omissions accepted.